


LED T12 LINEAR RETROFIT KIT



The LED T12 Linear Retrofit Kit is mainly for commercial use and is the ideal replacement retrofit kit for T12 4FT lamps. Can be used in warehouses, offices, garages, retail shops, and other commercial applications.



DIMENSIONS

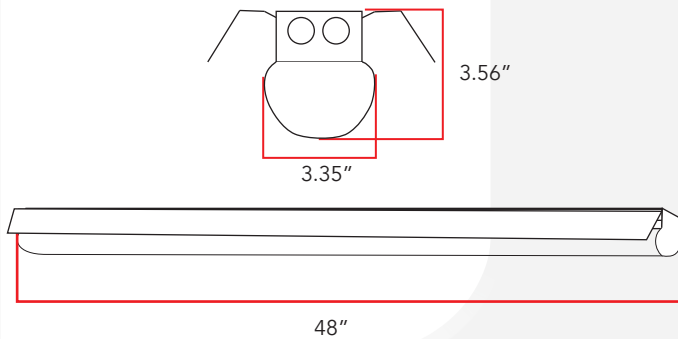

CERTIFICATIONS



FEATURES

- Simple and secure installation
- End to end mounting and wiring
- Seamless surface mounting application
- Linkable to 8FT strip fixture
- Diffused lighting distribution
- Minimize labor and recycling costs
- Acrylic drop lens that deliver low glare
- Espen dimmable driver
- 60% more energy saving compared to traditional lamps
- 5 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	3000K to 5000K
CRI	>80
Operation Temperature	-20°C to 50°C
Lumen efficiency	140 LPW
Input Voltage	AC100-277V
Frequency	50-60Hz
Power Supply Efficiency	90%
Rated Life	50,000 hrs.
Power Factor	More than 0.98

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

LED T12 LINEAR RETROFIT KIT



PRODUCT SPECIFICATION

Product Number	Length	Wattage	Color	Lumens	LxWxD (inch)	Input Voltage
ZY-SR4FT36	48"	36W	3000K-5000K	4680	48"x3.35"x3.56"	100-277 VAC
ZY-SR4FT40	48"	40W	3000K-5000K	5200	48"x3.35"x3.56"	100-277 VAC

ORDERING GUIDE

ZY	SR	4FT	36W/40W	3000-5000K
Company Code	Housing Type	Length	Wattage	CCT

CAUTION

- Risk of fire- do not install this lamp in a pre-heated luminaire.
- Risk of electric shock- make installation with gloves.
- Use only in place of fluorescent lamps specified on label.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- If lamp does not light when the luminaire is energized, remove this lamp from luminaire and contact manufacturer.
- Do not make mass installation before sample testing.