

LED UFO PRO

Adjustable LED High Bay - C Series



The LED UFO Pro is a watt adjustable LED high bay for most locations. Each fixture has a manual switch to change the output to suit your needs. With a glare guard and ribbed lens, this UFO reduces stress on the eyes when looking across the facility while providing ample lighting. With an all aluminum black housing and impact resistant plastic lens, this durable water resistant fixture is suitable for most locations. Integrated LEDs and internal driver make this fixture maintenance free.





Power Adjustable



Sensor

DIMENSIONS

C1:10" C2:12" C3:13"

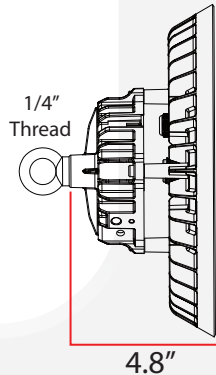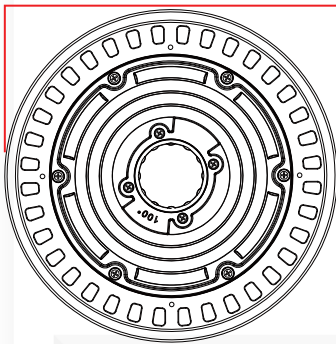

FEATURES

- 6 Foot AC Wire
- Optional Motion Sensor Foundation
- Threaded Eye Hook for Pendant Mounting
- 90 Degree Beam Angle
- Manually Adjustable Watt Output
- Solid Black Aluminum Housing
- Clear Ribbed Plastic Diffuser Lens
- Integrated Glare Guard
- IP65 Rating
- 5 Year Warranty

CERTIFICATIONS



RoHS

COMMON TECHNICAL DATA

Color Temperature	5000K
Beam Angle	90°
CRI	80
Operation Temperature	-40°F to 122°F
Lumen Efficiency	140 LPW
Input Voltage	AC100-277V
Frequency	50-60Hz
Rated Life	50,000 Hours
Power Factor	0.95
LED Type	2835
Housing	Black Aluminum and IR Plastic

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

LED UFO PRO

Adjustable LED High Bay - C Series




PRODUCT SPECIFICATION

Product Number	Watt	Lumens	Input	CCT	Dimming
U-100W-C1D50	100W	14,000	AC100-277V	5000K	0-10V
U-150W-C2D50	150W	21,000	AC100-277V	5000K	0-10V
U-200W-C3D50	100W/150W/200W	14,000/21,000/28,000	AC100-277V	5000K	0-10V
U-300W-C4D50	200W/240W/300W	28,000/33,600/45,000	AC100-277V	5000K	0-10V


ORDERING GUIDE

U	100/150/200/300	C1/C2/C3/C4	D50
Company Code	Wattage	Housing/Size	CCT 5000K


PHOTOMETRICS

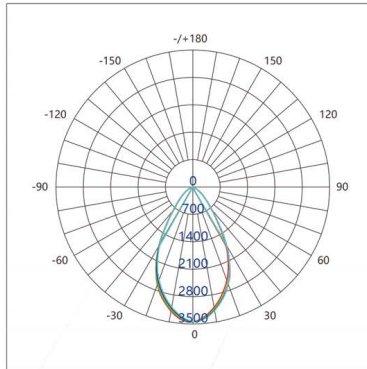

cd/klm

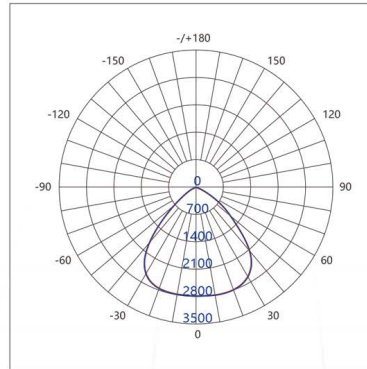

cd/klm

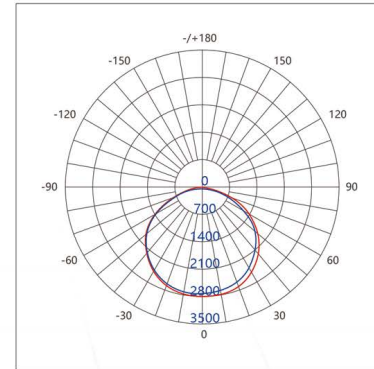

cd/klm

MOUNTING OPTIONS



Hook



Chain



Wall Mounting