


LED UFO


C Series UFO LED High Bay



The C Series UFO is a high output and durable LED High Bay. The solid aluminum pendant housing makes this a perfect replacement for Metal Halide fixtures in warehouses, storage facilities, factories, and anywhere light is needed in harsh locations.

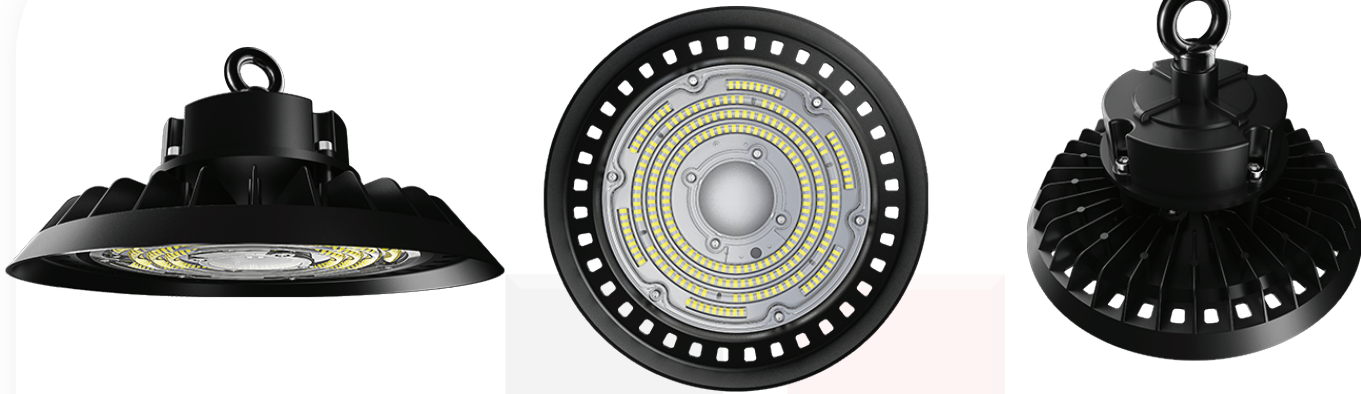

DIMENSIONS

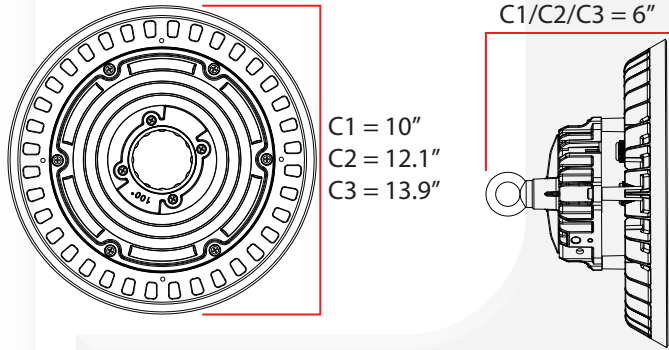

CERTIFICATIONS



FEATURES

- 130 Lumens per Watt
- IP65 Rating
- Pole or Pendant Mounting
- Die Cast Aluminum Housing Powdercoated Black
- Clear IR Lens
- 90 Degree Beam Angle
- 0-10V Dimming

COMMON TECHNICAL DATA

Color Temperature	5000K
Beam Angle	90 Degree
CRI	80
Operation Temperature	-22 to 122 Degrees F
Lumen Efficiency	130 LPW
Input Voltage	AC120-277V
Frequency	50-60Hz
Rated Life	50,000 Hours
Power Factor	More than 0.95
Housing	Die Cast Aluminum Black & Clear Plastic Lens

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

LED UFO

C Series UFO LED High Bay

PRODUCT SPECIFICATION

Product Number	Watt	CCT	Beam Angle	Lumens	Dimensions	Power
U-100W-C1D50	100W	5000K	90 Degree	13,000	10" x 6"/4 Lbs.	AC100-277V
U-150W-C2D50	150W	5000K	90 Degree	19,500	12.1" x 6"/6 Lbs.	AC100-277V
U-200W-C3D50	200W	5000K	90 Degree	26,000	13.9" x 6"/7 Lbs.	AC100-277V


ORDERING GUIDE

U	100W/150W/200W	C1/C2/C3	D	50	90
Fixture Style	Max Output	Size	Color Temp	5000K	Beam Angle

INSTALLATION INSTRUCTIONS

Mounting Procedure:

1. Turn OFF power at the breaker panel before installation.
2. Secure chain to the loop. Fix luminaire with chain to ceiling. Make sure the loop is securely screwed into the luminaire (A).
3. Use the buckles to fix the safety rope with the body and hook (A).
4. Connect the AC wires and/or dimming wires.
5. Switch ON power to the fixture at the breaker panel.

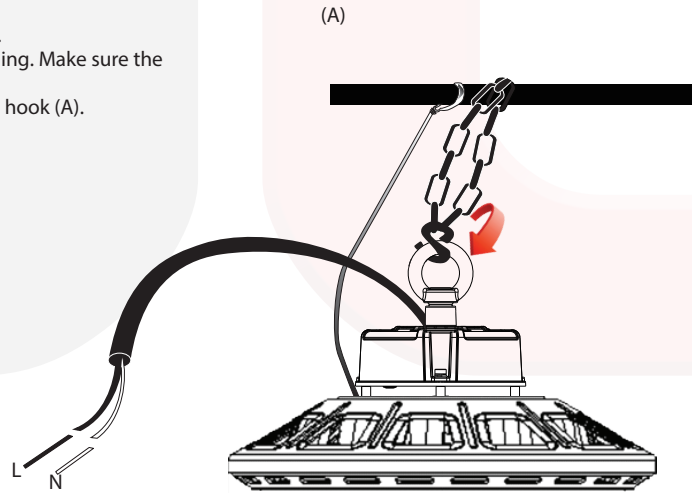

CAUTION

- Risk of fire- make sure power is OFF before installation.
- Risk of electric shock- make installation with gloves.
- All wiring needs to be performed per National Electrical Code and local code by a qualified electrician.
- These lamps can be used with a light dimmer.
- High temperatures inside luminaire make certain line voltage corresponds with ballast's primary voltage.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Luminaires should not be installed in narrow space to guarantee enough air convection.
- Do not make mass installation before sample testing.