
LED DRIVER WG02 SERIES

Driver Series for 13W (Non-Dimmable)



The LED Driver WG02 is suitable for 13W externally driven LED tube and strip applications.

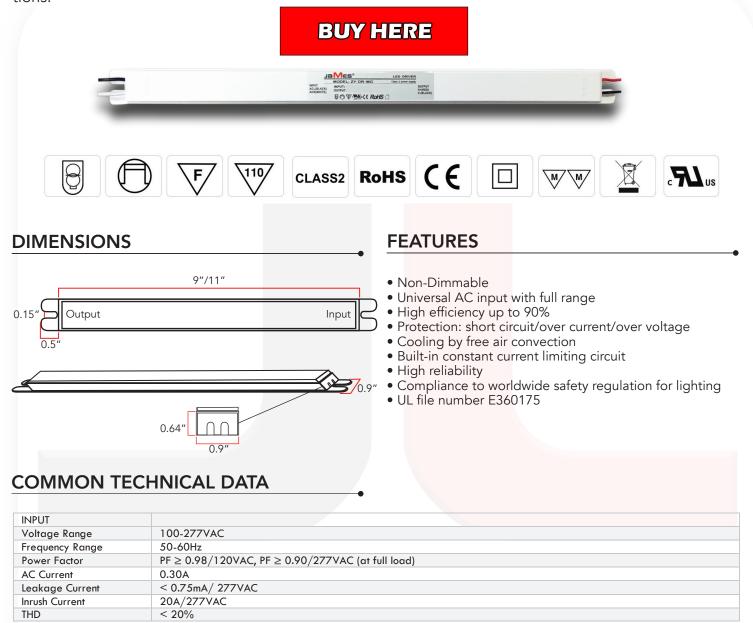

OUTPUT		
MODEL	ZY-DR-WG02-3	
Output Channel	1 Channel (NON-Dimmable)	
Rated Current	6500mA	
DC Voltage	40V	
Constant Current Region	28-40V	
Rated Power	13W	
Efficiency	91%	
Lifespan	50,000 Hours	
Current Accuracy	5%	
Line Regulation	1%	
Hold Up Time	30ms (at full load)	
Setup/Rise Time	3000mS (at full load)	

LED DRIVER WG02 SERIES

Driver Series for 13W (Non-Dimmable)




COMMON TECHNICAL DATA (cont'd)

PROTECTION	
Over Current	105-110%
	Protection type: Constant current limiting,
	recovers automatically after fault condition is
	removed
Short Current	Hiccup mode, recovers automatically after fault
	condition is removed
Over Voltage	105-125%
	Protection type: Shut down output voltage


ENVIROMENT	
Working Temperature	-20 to 40°C
Working Humidity	20-95% RH non-condensing
Storage Temperature, Humidity	-40 to 60°C, 10-95% RH
Temperature Coefficient	0.03% / °C (0-40°C)
Vibration	10-500Hz, 2G 12 Min. / 1 Cycle period for 72 min. each along X, Y, Z axes

WIRING CONNECTION

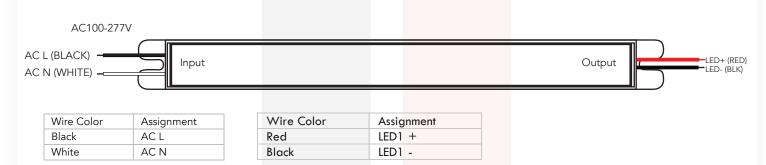

APPLICATION

ZY-DR-WG02-3	
Application Production	Model Name
LED External Tube	ZY-T8-13W600 BONT
LED External Tube	ZY-T8-13W900 BONT
LED External Tube	ZY-T8-13W1200 BONT
LED External Tube	ZY-T5-13W600 BONT
LED External Tube	ZY-T5-13W900 BONT
LED External Tube	ZY-T5-13W1200 BONT
LED Refrigeration	ZY-10W600 BONS
LED Refrigeration	ZY-10W900 BONS
LED Refrigeration	ZY-10W1200 BONS

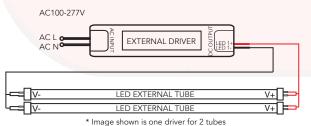

Note: One driver for 1 or 2 tubes