

Garden Bollard Light


Outdoor Landscape Light



The Garden Bollard Light is an outdoor LED landscape light with a stylish design for illuminating pathways, alley ways, sidewalks, building exteriors, and anywhere a beautiful area light is needed. Durable, long lasting, and energy saving qualities make it an excellent choice for your outdoor illumination needs.



DIMENSIONS

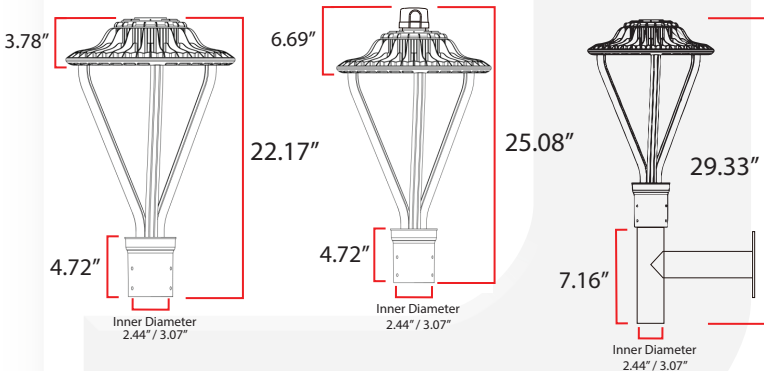

CERTIFICATIONS



FEATURES

- 2 Mounting Options: Pole & Wall Bracket
- Optional Photocell Sensor
- Durable housing for optimal harsh environment resistance
- High CRI & Lumen Efficiency at 130 LPW (150LPW Available)
- 50,000 hour rated life
- Uniform light distribution
- Wide CCT range available
- **IP67 Rated**

COMMON TECHNICAL DATA

Color Temperature	2700K/3000K/4100K/5000K/5700K
Beam Angle	120°
CRI	80/90
Operation Temperature	-40°C to 45°C
Lumen Efficiency	130 LPW
Input Voltage	AC100-277V
Frequency	50/60Hz
Rated Life	50,000 Hours at 25°C
Power Factor	More Than 0.95
Housing	Aluminum Die-Cast

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

Garden Bollard Light

Outdoor Landscape Light




PRODUCT SPECIFICATION

Product Number	Watt	Lumens	Beam Angle	CCT
GRL-30W	30	3900	120°	2700K/3000K/4100K/5000K/5700K
GRL-50W	50	6500	120°	2700K/3000K/4100K/5000K/5700K
GRL-75W	75	9750	120°	2700K/3000K/4100K/5000K/5700K
GRL-100W	100	13000	120°	2700K/3000K/4100K/5000K/5700K

ORDERING GUIDE

GRL	30W/50W/75W/100W	2700K/3000K/4100K/5000K/5700K
Product Code	Wattage	CCT


LIGHT DISTRIBUTION

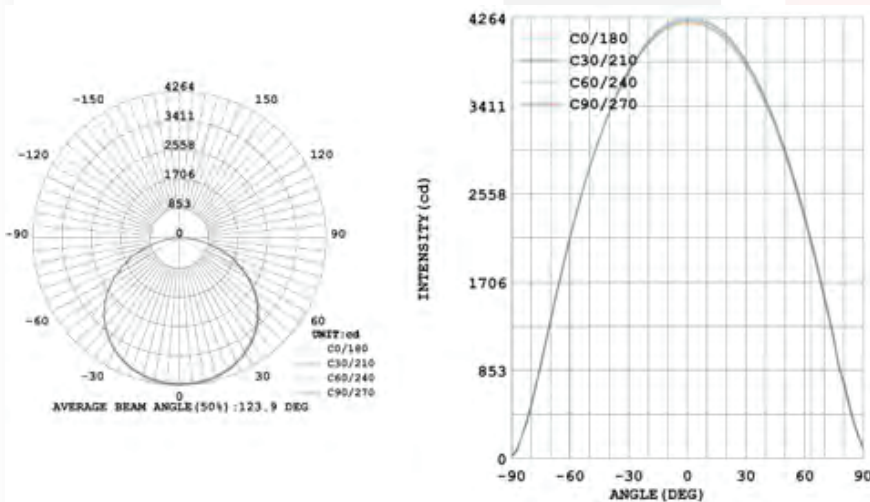

WIRING INSTRUCTIONS

Universal voltage driver permits operation at 100- 277VAC, 50/ 60Hz.

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the green Ground wire from fixture to supply ground.

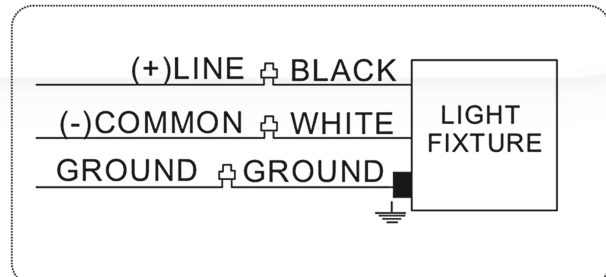

Garden Bollard Light

Outdoor Landscape Light



FIXTURE ASSEMBLY


Step 1: Feed the (3) housing wires through one of the three rods.

Step 2: Clip the (3) rods onto the housing. Be sure the housing clips are properly engaged onto the rods.

Step 3: Feed Fixture Wires through the Tenon Pole Adapter.

Step 4: Slide the Tenon Pole Adapter onto the three rods. Be sure the notches face the inside of the Tenon Pole Adapter.

Step 5: Tighten the (3) Set Screws at the Tenon Pole Adapter to secure the rods.


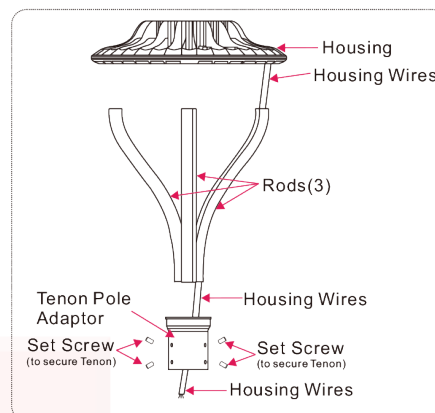


POLE MOUNTING

Step 1: Turn off the power before installation.

Step 2: Connect proper wires inside the wiring box ("Black" connects to "L", "White" connects to "N", "Green" connects to "Ground") and set the lamp into the bracket by the hole. (Picture 1)

Step 3: Fasten the four screws with a hex wrench, and you're done! (Picture 2)

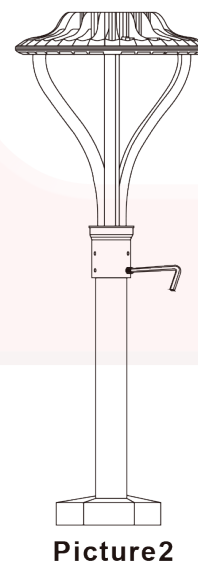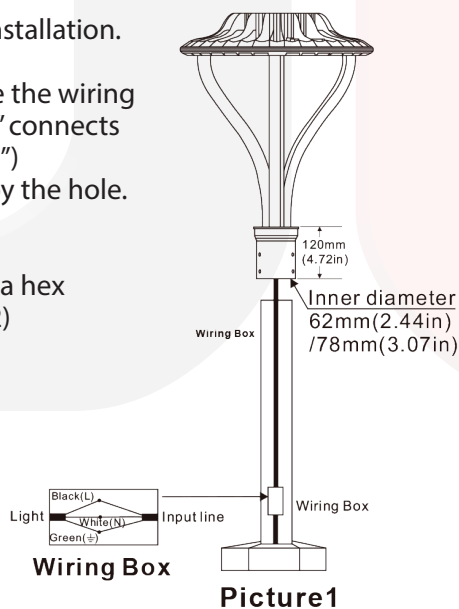

OPTIONAL ACCESSORIES



Pole Bracket



Wall Bracket



With Sensor