


LED WRAP LIGHT



Wrap Light Fixture



The LED Wrap Light is the ideal replacement for existing fluorescent wrap lights. The Wrap Light offers an exceptional illumination perfect for a variety of settings such as shopping malls, offices, hospitals and classrooms.

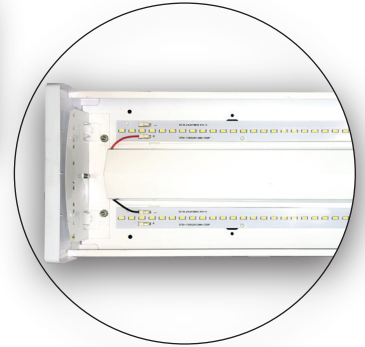

DIMENSIONS



CERTIFICATIONS



FEATURES

- Suitable for ceiling mount or suspended mount
- Ideal for harsh environment applications
- 0-10V Dimmable Driver
- Special wrap diffuser design
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- 5 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	3000K-5000K
Beam Angle	120° degrees
CRI	>80
Operation Temperature	-30°C to 40°C
Lumen Efficiency	More than 120 LPW
Input Voltage	100-277VAC
Frequency	50-60Hz
Power Supply Efficiency	90%
Rated Life	50,000 hours
Power Factor	More than 0.99
LED Type	SMT 2835
Housing	Aluminum & Plastic

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

PRODUCT SPECIFICATION

Model Number	Length (FT)	Wattage	Color	Lumens	Input Voltage	QTY/CTN
ZY-STAP4FT36W	4FT	36W	3000K-5000K	4680 lm	100-277 VAC	4pcs/CTN
ZY-STAP4FT42W	4FT	42W	3000K-5000K	5460 lm	100-277 VAC	4pcs/CTN

ORDERING GUIDE

ZY	STAP	4FT	36W/42W	3000K-5000K
Company Code	Housing Type	Length	Wattage	Color


MOUNTING OPTIONS

*Ceiling Mount or Suspended Mount



WIRING CONNECTION

*Before connection: Please open cover, discard packaging materials, then secure shut cover.

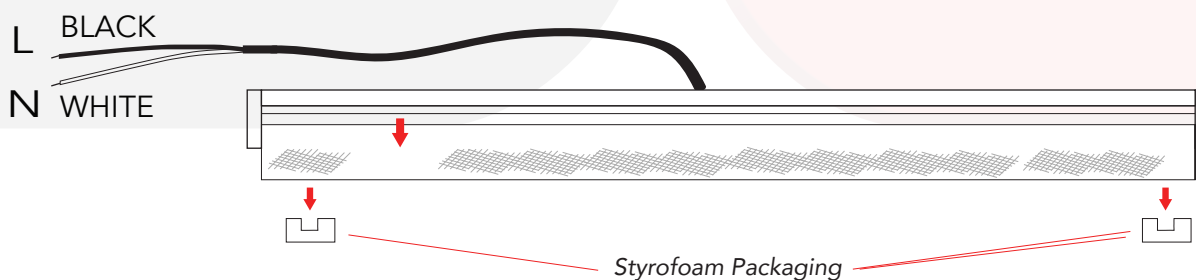

CAUTION

- Risk of electric shock- make installation with gloves.
- Use only in place of fluorescent lamps specified on label.
- These lamps are to be used with a light dimmer.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Not suitable for wet locations.
- Do not make mass installation before sample testing.