


LED Parking Garage Light



The LED Parking Garage lights are durable and dependable outdoor lights. Ideally the perfect choice for parking garages, gas stations, service stations, underground parking lots, warehouses, factories, and anywhere a durable and low profile LED light is needed.



DIMENSIONS

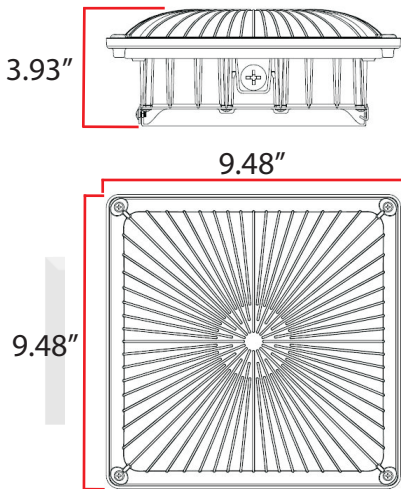

CERTIFICATIONS & RATINGS



FEATURES

- Simple Installation
- 50,000 Hour Life
- Instant Start - No Hum No Flicker
- IP65 Rated
- Soft, Uniform White Light

COMMON TECHNICAL DATA

Color Temperature	5000K
Beam Angle	150°
CRI	>70
Operation Temperature	-20°C to 45°C
Lumen Efficiency	113.4 lm/W
Input Voltage	100-277Vac
Frequency	50/60Hz
Rated Life	50,000 Hours
Power Factor	>0.9
LED Type	LUXEON 3030 2D (1.5W)
Housing	White Aluminum and Plastic Lens
Waterproof Rating	IP65

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting® does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting® reserves the right to alter specifications without prior notice.


LED Parking Garage Light



PRODUCT SPECIFICATION

Product Number	Watt	Lumens	CRI	Total Harmonic Distortion	CCT	Efficacy (AC)
EV-SCP02-55WAANA1	56.58	6416	73.1	13.48%	5000K	113.4
EV-SCP2-75WAAA1	75	8602	74.5	13.48%	5000K	114.9

LIGHT DISTRIBUTION

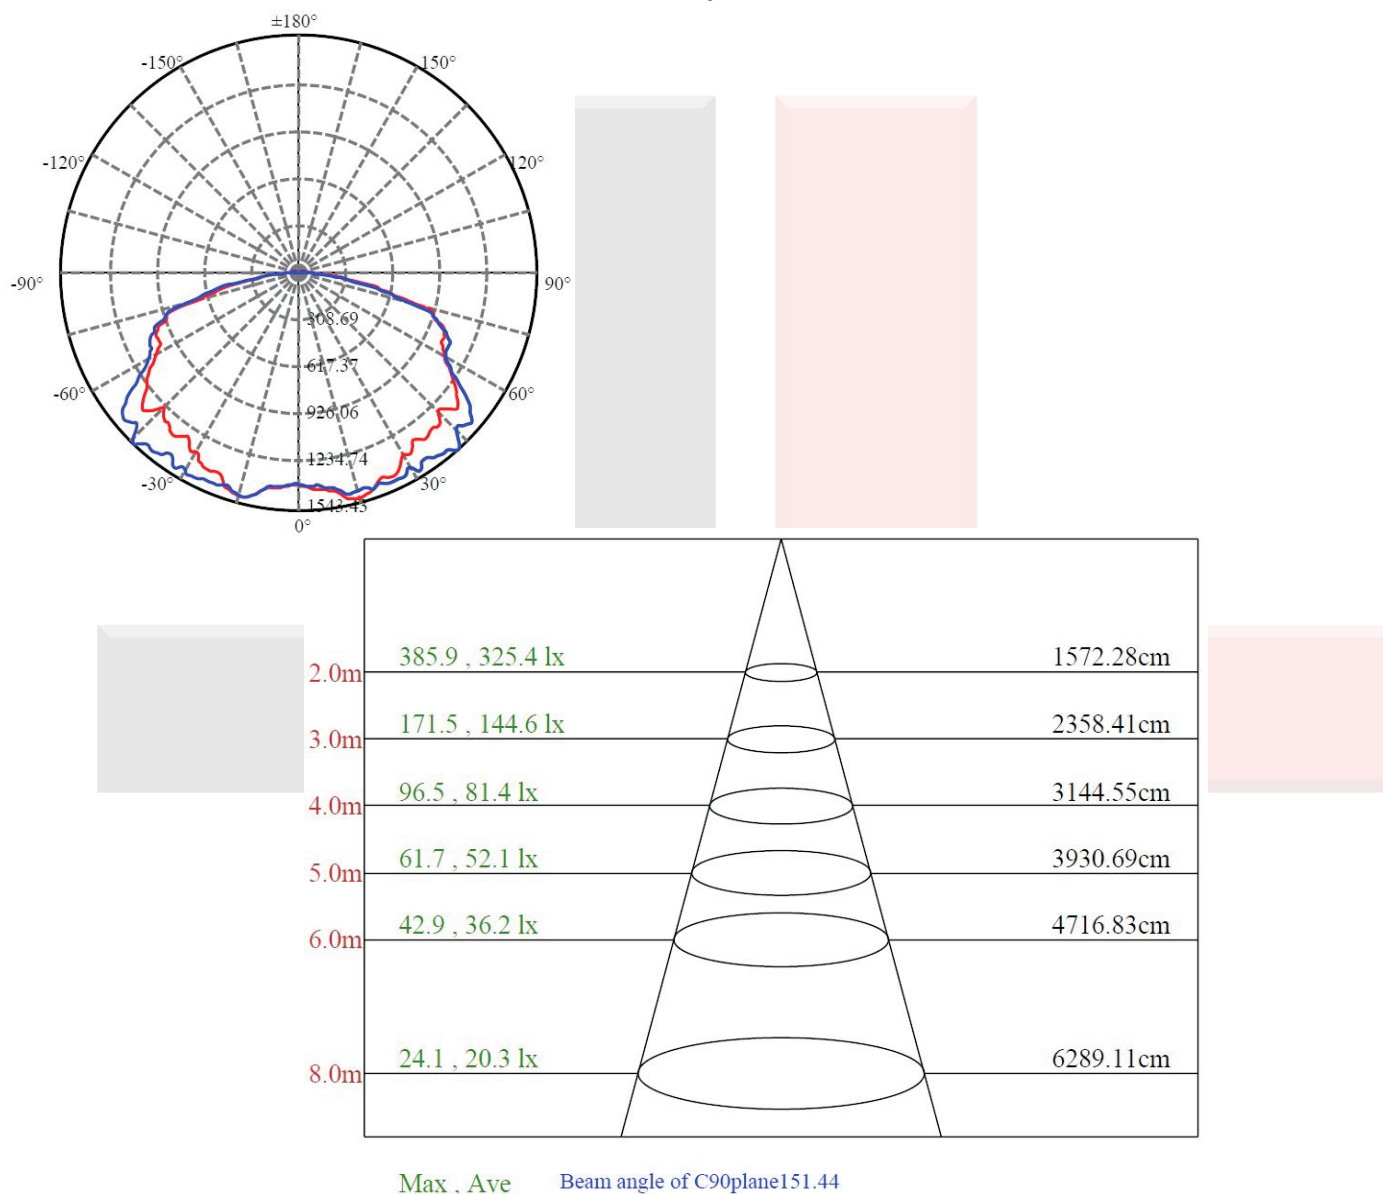

CAUTION

- Risk of fire- make sure power is OFF before installation.
- Risk of electric shock- make installation with gloves.
- All wiring needs to be performed per National Electrical Code and local code by a qualified electrician.
- These lamps can be used with a light dimmer.
- High temperatures inside luminaire make certain line voltage corresponds with ballast's primary voltage.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Luminaires should not be installed in narrow space to guarantee enough air convection.
- Do not make mass installation before sample testing.