

LED TRI-PROOF


Linear Fixture



The LED Tri-Proof Light is ideally used as utility lighting in parking garages, stairwells, and harsh environments. Perfect for dry or wet location applications.



DIMENSIONS

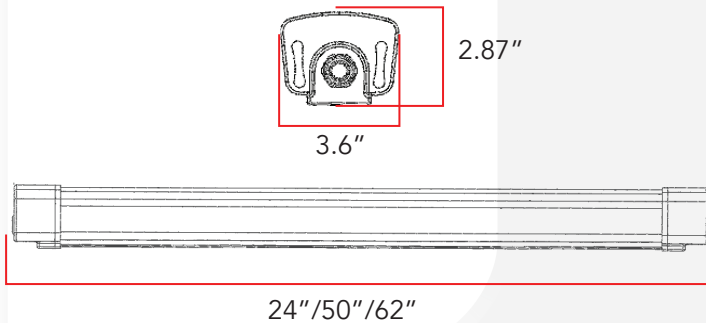

CERTIFICATIONS



FEATURES

- Suitable for ceiling mount or suspended mount
- Ideal for harsh environment applications
- Stainless steel clips
- Mean Well driver
- Excellent light distribution and uniformity
- 5 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	3000K-5000K
Beam Angle	120° degrees
CRI	>80
Operation Temperature	-30°C to 40°C
Lumen Efficiency	More than 135 LPW
Input Voltage	100-277VAC
Frequency	50-60Hz
Power Supply Efficiency	90%
Rated Life	50,000 hours
Power Factor	More than 0.99
LED Type	SMT 2835
Housing	Aluminum & Plastic

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

LED TRI-PROOF

Linear Fixture



PRODUCT SPECIFICATION

Product Number	Degree	Wattage	Color	Lumens	Dimensions	Voltage
ZY-S4-40W BDZ	120°	40W	4000K-5000K	5200	47.64"x3.54"x2.56"	AC100-277V
ZY-S4-80W BDZ	120°	80W	4000K-5000K	10400	47.64"x3.54"x2.56"	AC100-277V
ZY-S4-100W BDZ	120°	100W	4000K-5000K	13000	47.64"x3.54"x2.56"	AC100-277V
ZY-S5-60W BDZ	120°	60W	4000K-5000K	7800	59.5"x3.54"x2.56"	AC100-277V
ZY-S5-80W BDZ	120°	80W	4000K-5000K	10400	59.5"x3.54"x2.56"	AC100-277V
ZY-S5-100W BDZ	120°	100W	4000K-5000K	13000	59.5"x3.54"x2.56"	AC100-277V
ZY-S5-150W BDZ	120°	150W	4000K-5000K	19500	59.5"x3.54"x2.56"	AC100-277V
ZY-S5-200W BDZ	120°	200W	4000K-5000K	36000	59.5"x3.54"x2.56"	AC100-277V

ORDERING GUIDE

ZY	S4/S5	40W/60W/80W/100W/150W/200W
Company Code	Housing Type	Wattage

CAUTION

- Risk of electric shock- make installation with gloves.
- Use only in place of fluorescent lamps specified on label.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Not suitable for wet locations.
- Do not make mass installation before sample testing.