


LED SHOP LIGHT



The LED Shop Light is an ideal solution for any garage, work area, storage space, and basement. The Shop Light comes with an easy on/off pull chain and provides a beam of light that can illuminate large space.



DIMENSIONS

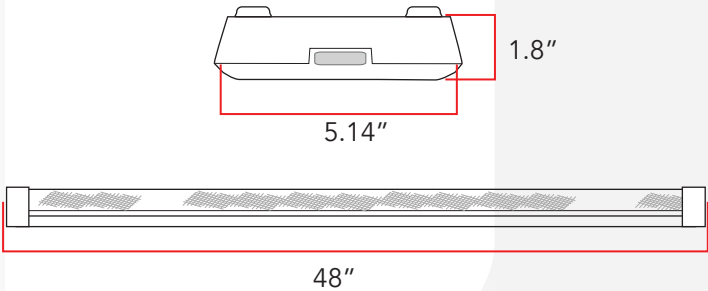

CERTIFICATIONS



FEATURES

- Suitable for ceiling mount or suspended mount
- Energy Star
- Internal Driver
- Pure white paint on stainless steel
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- 3 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	5000K
Beam Angle	120° degrees
CRI	>80
Operation Temperature	-30°C to 45°C
Lumen Efficiency	More than 100 LPW
Input Voltage	100-277VAC
Frequency	50-60Hz
Power Supply Efficiency	90%
Rated Life	35,000 hours
Power Factor	More than 0.99
LED Type	SMT 2835
Housing	Stainless Steel & Plastic

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.



PRODUCT SPECIFICATION


Model Number	Length (FT)	Wattage	Color	Lumens	Input Voltage	QTY/CTN
EV-003MFL-40	4FT	40W	5000K	4000 lm	100-277 VAC	3pcs/CTN

ORDERING GUIDE

EV	003MFL	40W	5000K
Company Code	Housing Type	Wattage	Color

MOUNTING OPTIONS

*Ceiling Mount or Suspended Mount



CAUTION

- Risk of electric shock- make installation with gloves.
- If the lamp or luminaire exhibits undesirable operation (i.e. buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Not suitable for wet locations.