


LED STREET LIGHT



The LED Street Light is ideal in replacing roadway lights. The Street Light is typically used to light up parking lots, walkways, roadway, and other area of lighting applications where a large pool of lighting is required.



DIMENSIONS

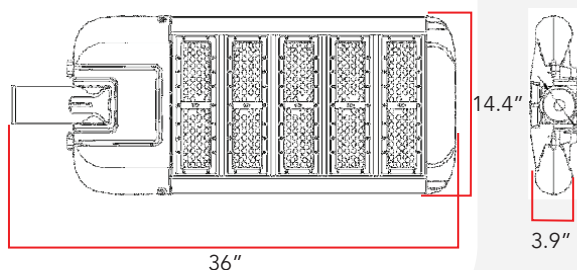

NOTE:
DIMS shown are for 300W.
Please check Product Specifications
for additional wattage DIMS.

CERTIFICATIONS



FEATURES

- Industry leading 5G vibration rating per ANSI C136.31
- Optional light-controlled and surge protection function
- Suitable for damp or dry environments
- Excellent light distribution and uniformity
- **Rated IP65**
- 5 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	5000K
Viewing Angle	Type II
Color Consistency	4 steps
CRI	More than 80
Operation Temperature	-30° C to 45°C
Efficiency	More than 110LPW
Input Voltage	100-277VAC
Frequency	50-60Hz
Power Factor	More than 0.99
Rated Life	50,000 hours
LED Type	SMT 3030 1.5W Philips LED
Housing	Aluminum

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. JL Lighting does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. JL Lighting reserves the right to alter specifications without prior notice.

LED STREET LIGHT



PRODUCT SPECIFICATION

Product Number	Watt	CCT	Lumens	Viewing Angle	Dimensions Length x Width x Height
ZY-SST-60W	60W	5000K	7200	Type II	19.5"x14.4"x3.9"
ZY-SST-120W	120W	5000K	14500	Type II	23.6"x14.4"x3.9"
ZY-SST-180W	180W	5000K	22200	Type II	27.7"x14.4"x3.9"
ZY-SST-240W	240W	5000K	29000	Type II	31.9"x14.4"x3.9"
ZY-SST-300W	300W	5000K	36500	Type II	36"x14.4"x3.9"

ORDERING GUIDE

ZY	SST	60W/120W/180W/240W	5000K
Product Code	Housing	Wattage	CCT

CAUTION

- Avoid fire and electric shock.
- When installing the lighting fixture, please contact an electrician.
- Do not drill holes or change the internal lines when installing.
- Understand the structural features and dimensions of lighting before installation.
- Do not make mass installation before sample testing.